

Optical Spectrum/Channel Analyzer

F
T
E
8
1
0
0



Features:

- Up To 98 Channels
- 50 or 100 GHz
- IEC61300-3-35 Auto Pass/Fail Video Inspection
- Pass/Fail Thresholds
- Fast Real Time with <1/2 second Update
- Bar Graph and Table Displays
- Auto Test Zooms in on Active Channels
- Rugged Case w/Impact Resistant Boot
- Solid State Optics-No Moving Parts
- User Setup Screen
- 4" Touch Color Display
- Impact Resistant Boot
- Stores up to 1000 test
- USB/PC Port

The FTE-8100 Optical Spectrum Analyzer is one of the most rugged and affordable full featured Mini OSAs on the market. This C-band hand held OSA is available in up to 98 channels with 50 and 100 GHz channel spacing. The FTE-8100 is simple and fast to operate with its touch screen operation and twice a second scan. It offers high end features such as power tilt monitoring for DWDM channel equalization.

With a full set of selectable scale limits and thresholds, the FTE8100 makes zeroing in on channel measurements easy. For flexibility the channel numbers are selected in wavelength or frequency. The information is displayed in graph or table mode on the 4" bright color touch screen. This unit allows users to set pass/fail thresholds and can store up to 1000 tests that can be downloaded via the USB PC port. Documentation is fast and easy with the included Cert-Soft certification software. The onboard Help system assists new users in parameter setup and file manipulation.

The FTE-8100 offers an IEC61300-3-35 auto Pass/Fail video inspection feature for use with the optional VIS-300 Video Probe

(888) U.S.-OTDRS



Made In the USA


Terahertz Technologies Inc.
169 Clear Rd., Oriskany NY 13424
Toll Free 888-U.S.-OTDRS (876-8377)
Phone: 315-736-3642 Fax: 315-736-4078
E-mail: sales@tera.us
Web: www.teratec.us

©11/2018 Terahertz Technologies Inc.

FTE-8100 Specifications	
Wavelength Range	Channels 14 - 62.5 196.25THz - 191.4THz 1527.6 -1566.31nm
Channel Spacing	50GHz, 100GHz
Wavelength Accuracy	±0.1nm
Channel Power Range	+10dBm to -50dBm
Absolute Accuracy	±1 dB
Max Composite Power	+28 dBm
PDL	±0.15dB
Optical Rejection Ratio	40dBc (@50GHz)
Measurement Time	< 1/2 Second
Readout Resolution	0.01dB
Return Loss	>40dB
General	
Optical Interface	Universal FC/SC UPC** (Optional APC)
Graphical Display	bar graph and table view
Display	4 in. touch color TFT
Dimensions	7.62" L x 3.88" W x 1.56" H (194mm L x 99mm W x 40mm H)
Weight	1.6 lbs
Battery	Rechargeable NiMH - 6 hours operating time
Power	100-240 universal US, GB, EU, AU Mains
Operating Temperature	-10°C to 40°C
Storage Temperature	-20°C to 60°C
Accessories Included	Universal power supply with mains for US, UK, CE and AU. Interchangeable FC and SC adapters (unless ordered with specific connector style), CertSoft Software Suite, USB cable, manual and rubber boot

** If the ordered part number contains a specified connector style, the FTE-8100 will be built with a fixed connector of choice. (not interchangeable)


TTI reserves the right to change specifications without notice.

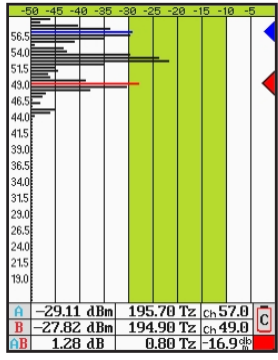

Graphical View

53.0	-45.92	48.0	-37.77	37.0	26.0
58.5	-48.15	47.5	-46.84	36.5	25.5
58.0	-48.23	47.0	-47.65	36.0	25.0
57.5	-39.81	46.5		35.5	24.5
57.0	-29.11	46.0	-48.15	35.0	24.0
56.5	-29.81	45.5		34.5	23.5
56.0	-34.99	45.0	-45.04	34.0	23.0
55.5	-41.09	44.5	-46.00	33.5	22.5
55.0	-49.17	44.0	-49.09	33.0	22.0
54.5	-43.32	43.5	-49.78	32.5	21.5
54.0	-42.54	43.0		32.0	21.0
53.5	-29.78	42.5		31.5	20.5
53.0	-23.81	42.0		31.0	20.0
52.5	-21.72	41.5		30.5	19.5
52.0	-35.94	41.0		30.0	19.0
51.5	-45.12	40.5		29.5	18.5
51.0	-44.36	40.0		29.0	18.0
50.5	-46.42	39.5		28.5	17.5
50.0	-45.94	39.0		28.0	17.0
49.5	-38.84	38.5		27.5	16.5
49.0	-29.25	38.0		27.0	16.0
48.5	-30.33	37.5		26.5	15.5
A	-29.11 dBm	1531.90 nm	ch 57.0	C	
B	-27.82 dBm	1538.19 nm	ch 49.0		
B	1.28 dB	6.4 nm	-16.9 dB		

Table View

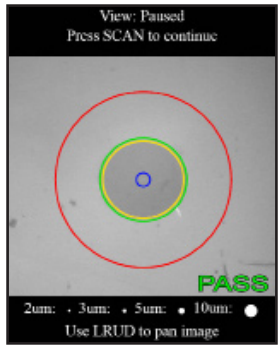

IEC61300-3-35
Auto Pass/Fail
Video System

Ordering Information	
FTE-8100C	C Band Hand Held Optical Spectrum/Channel Analyzer

(888) U.S.-OTDRS



Made In the USA

Terahertz Technologies Inc.
169 Clear Rd., Oriskany NY 13424
Toll Free 888-U.S.-OTDRS (876-8377)
Phone: 315-736-3642 Fax: 315-736-4078
E-mail: sales@teratec.us
Web: www.teratec.us

TTI makes every effort to insure all statements and information for the products referred to in this document are accurate and reliable. TTI can not accept any responsibility for errors, omissions or miss statements, nor can they accept responsibility for any actions taken based on the information demonstrated herein. TTI reserves the right to make changes of any kind to the product referred to in this document without prior notice. © 11/2018 Terahertz Technologies Inc.