

LTX-551X Analog/Digital Fiber Optic Link



- Features:**
- One analog plus up to four digital channels
 - DC to 25 MHz analog bandwidth
 - Input ranges of ± 1 V and ± 5 V
 - Analog signal digitized to 12 or 14 bit precision
 - DC to 48 Mb/s data rate (each channel)


Analog/Digital Fiber Optic Link

The LTX-5510 and the LTX-5515 Signal Transports enables the precise conveyance of one analog channel plus up to four digital channels of information over fiber optic links ranging from meters to more than 10 kilometers. Incoming analog data is digitized to 12 or 14 bit precision at up to 100 mega-samples per second and transmitted over optical fiber at one to two gigabits per second depending on the model. The receiver acquires this digital data and accurately reconstructs the analog signal at the far end of the fiber optic link.

The analog signal bandwidth is from DC to 25 MHz (-3 dB). Two input voltage ranges are provided, ± 1 Volt and ± 5 Volts (Special input voltages may be requested). The input impedance of the transmitter analog channel may be set to 50 ohms or 1 megohm (75 ohms is optional). Multiplexed along with the analog data, are up to four independent TTL/CMOS/LVTTL digital signals that may be toggled at rates of up to 48 Mb/s.

The LTX-5510 and LTX-5515 models are available in multi-mode or single-mode versions depending on the transmission distance required. The LTX-55XX-850 transmits at 850nm over multi-mode fiber optic links of up to 500 meters in length, while the LTX-55XX-1310 transmits at 1310nm over single-mode fiber to span distances exceeding 10 km.

Applications include data acquisition for plasma physics experiments, signal transmission and control of equipment at high voltage potentials, transmission of high quality video, and precise noise-free signal transmission in hostile EMI environments.

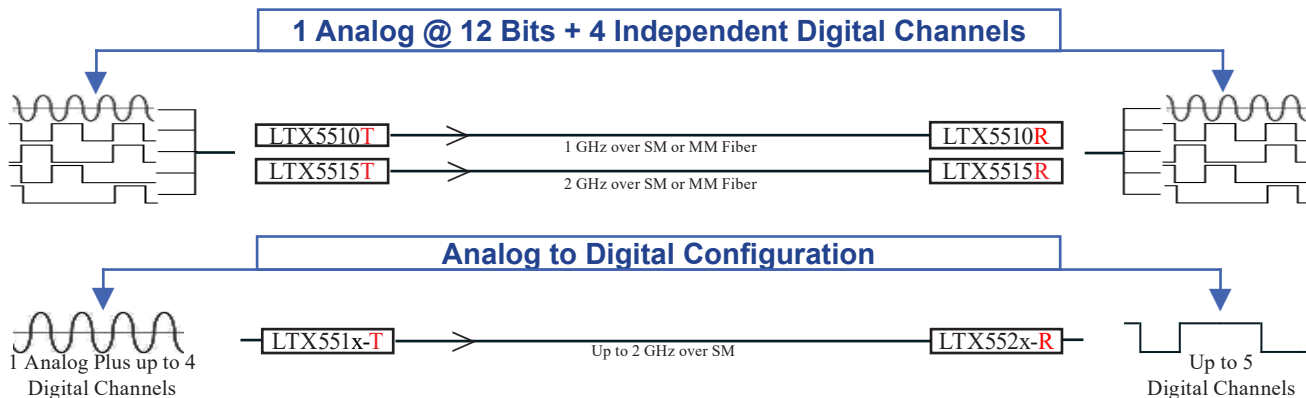

Made In the USA

Terahertz Technologies Inc.
 169 Clear Rd., Oriskany NY 13424
 Toll Free: 855-TTI-TEAM
 Phone: 315-736-3642 Fax: 315-736-4078
 E-mail: sales@teratec.us
 Web: www.teratec.us

LTX-551X-Specifications

| | LTX-5510 | LTX-5515 |
|--|---|---------------------------------------|
| Analog Signal Bandwidth | DC to 12.5 MHz (-3 dB) | DC to 25 MHz (-3 dB) |
| Input Voltage Ranges | +/- 1 V or +/- 5 V (selectable) | |
| Resolution | 12 or 14 bit | |
| Transfer Accuracy | +/- 0.1% Full Scale, +/- 20 mV offset | |
| Signal Latency (with one meter of fiber) | Approximately 300 nS | |
| A/D Sampling Rate | 50 Megasamples/S | 100 Megasamples/S |
| Input Impedance | 50 Ohms or 1 Megohm 20 pF, (selectable) | |
| Output Drive Capability | +/- 5 V open circuit, +/- 2 V into 50 ohm load | |
| Output Impedance | 50 Ohms | |
| Digital Inputs | TTL, LVTTTL, CMOS compatible | |
| Digital Outputs | LVTTTL (0 - 3.3 V) | |
| Digital switching Rates | 0 - 12 MHz | 0 - 24 MHz |
| Digital Signal Edge Uncertainty | 0 - 20 nS | 0 - 10 nS |
| Laser Wavelength | 850 nm +/- 20 nm or 1310 nm +/- 20 nm | |
| Optical Transmission Rate | 1.0 Gb/S | 2.0 Gb/S |
| Loss Budget | 15 dB max | |
| Optical Return Loss | > 15 dB | |
| Laser Safety Classification | Class I safety per FDA/CDRH and IEC-825-1 regulations | |
| Typical Trans. Distances MM | 500 M - 50/125µ and 300 M - 62.5/125µ | 250 M - 50/125µ and 150 M - 62.5/125µ |
| Typical Trans. Distances SM | 10 KM with 9/125 micron fiber | |
| Fiber Optic Connectors | ST standard, FC optional | |
| LED Annunciators Provided | Input Overload (TX), Optical Signal (RX) | |
| Power Requirements | 9 - 24V DC, 500mA | |
| Power Supply Included | 95 - 260 VAC, 50 - 60 Hz, 16 VA Max - Output 9VDC/.67A with Universal, US, UK, Continental Europe and Australian plugs included | |
| Fiber Optic Connectors | ST standard, FC available upon request | |
| LED Annunciators Provided | Input Overload (transmitter), Optical Signal - ON (receiver) | |
| Tx and Rx Dimensions | 6.89L x 4.1W x 1.6H in. (175L x 105 W x 40 H mm) | |
| Operating Temperature | 0 - 40 C | |
| Weight (each) | 16.2 oz. (0.46 Kg) | |
| Standard Warranty | Two Years, Components and Workmanship, 30 day Satisfaction Guarantee | |
| Accessories Supplied | 5 pin DIN DB25 Connectors for Digital Inputs/Outputs and Power Supply With International Mains | |

TTI reserves the right to change specifications without notice.

To Order:

LTX-551X-X-X

Optical Transmission Rate:

0 = 1 gigabit
5 = 2 gigabit

Laser Wavelength:

850 = 850nm Multi-mode
1310 = 1310nm Singlemode

Analog Bit Rate

Blank = 12 bit
14 = 14 bit



Made In the USA

TTI makes every effort to insure all statements and information for the products referred to in this document are accurate and reliable. TTI can not accept any responsibility for errors, omissions or miss statements, nor can they accept responsibility for any actions taken based on the information demonstrated herein. TTI reserves the right to make changes of any kind to the product referred to in this document without prior notice.

© 1/20 Terahertz Technologies Inc.